

INDUSTRIAL INC.

www.kar.ca

Toronto | Montréal | Edmonton

←INSIZE→

TOOLS THAT MEASURE UP

EXCLUSIVELY AVAILABLE FROM **KAR** IN CANADA 

2022  
←BEST→  
SELLERS

TOP 50+



1 YEAR MANUFACTURER'S  
WARRANTY ON **INSIZE** TOOLS

**NIST**  
CERTIFICATION

TOOLS WITH THIS MARK SUPPLIED  
WITH MANUFACTURER'S INSPECTION  
CERTIFICATE AND ARE TRACEABLE  
TO NIST (NATIONAL INSTITUTE OF  
STANDARDS & TECHNOLOGY)

LEARN MORE

VIDEO: <https://youtu.be/2j9BGVKbzS4>

## Electronic Measuring Microscope

- Records photos and video
- Supplied with measuring software (requires Windows XP SP2, Vista, Windows 7, 8 or 10 operating system)
- Data export to CAD or Microsoft Excel
- Magnification: 10X to 200X
- Pixels: Standard – 1.3M (resolution: 1280x1024)
- Built-in adjustable LED
- Power supply: USB 2.0 cable (voltage required: 5±0.1V)



Code 285000  
**607.69**

Laptop not included

Standard stand

Magnification (Inch)	Focus Distance (Inch)	View Field (Inch)	Accuracy (Inch)
50x	0.83	0.32 x 0.25	0.0012
100x	0.51	0.15 x 0.12	0.0006
150x	0.63	0.10 x 0.08	0.0004
200x	0.75	0.07 x 0.06	0.0003

Includes one of each: Microscope, Stand, White/Black plate, Focus support ring 80X/150X, Focus support ring 60X/200X, Calibration rule (graduation 0.1mm), Calibration rule (graduation 1mm), ISM-PRO software CD

## Ultrasonic Thickness Gage

- Resolution: 0.001" (range <10")  
0.01" (range >10")
- Accuracy: ±0.002 (range <0.4")  
±(0.002+H/1000) (range 0.4-4")  
±H/333 (range ≥4")  
*H is the thickness to be measured in inch*
- Applicable temperature: <140°F
- Suitable for pipes, tanks, etc.
- Minimum size of pipe for measurement:  
0.79" diameter x 0.05" wall thickness
- Supplied with transducer (5MHz, Ø0.43"), bottle of couplant and 2 x AAA batteries
- Supplied with manufacturer inspection certificate
- Weight: 0.49 lbs
- Supplied in fitted storage case

Measure thickness from one side of workpiece



Range: 0.03-11.81 Inch  
Code 816694

**1268.08**



Applicable materials: metal, plastic, glass, nylon, resin, ceramic, ice  
Not recommended for casting workpieces

YOUR AUTHORIZED KAR DISTRIBUTOR:



5500 Tomken Rd, Unit #2  
Mississauga, ON L4W 2Z4  
[www.caliberindustrial.com](http://www.caliberindustrial.com)  
[sales@caliberindustrial.com](mailto:sales@caliberindustrial.com)

Mississauga: 905.624.5524  
Toronto: 416.626.7151  
Toll Free: 1.800.465.5743  
Fax: 905.602.8758

MAKING IT EASY TO DO BUSINESS WITH SINCE 1954... CONTACT YOUR LOCAL KAR DISTRIBUTOR TODAY!

## Electronic, Dial & Vernier Calipers

### Standard Model



OPTIONAL ACCESSORY: SPC cable

- Resolution: 0.0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Auto power off, move digital unit to turn power on
- Battery CR2032
- Data output
- Stainless steel construction
- Supplied in fitted storage case

0-6 Inch/0-150mm  
Accuracy:  $\pm 0.0010"$   
Code 817000

71.74

0-8 Inch/0-200mm  
Accuracy:  $\pm 0.0015"$   
Code 817001

99.03

0-12 Inch/0-300mm  
Accuracy:  $\pm 0.0015"$   
Code 817002

173.78

### Fractional Reading



- Resolution: 0.0005", 1/128" (fractional), 0.01mm
- Buttons: zero, unit (mm/inch/fraction), ABS (absolute and incremental), on/off
- Auto power off
- Battery CR2032
- Data output
- Stainless steel construction
- Supplied in fitted storage case

0-6 Inch/0-150mm  
Accuracy:  $\pm 0.0015"$   
Code 280003

106.49

0-8 Inch/0-200mm  
Accuracy:  $\pm 0.0015"$   
Code 280004

159.00

0-12 Inch/0-300mm  
Accuracy:  $\pm 0.0015"$   
Code 280005

230.82

### Dial Calipers



- Graduations: 0.001"
- One revolution equals: 0.1"
- Shock proof dial indicator
- Supplied in fitted storage case

0-6 Inch/0-150mm  
Accuracy:  $\pm 0.0015"$   
Code 816028

86.29


0-8 Inch/0-200mm  
Accuracy:  $\pm 0.0020"$   
Code 816030

114.28

0-12 Inch/0-300mm  
Accuracy:  $\pm 0.0020"$   
Code 816032

209.11

### Zinc Alloy Casing

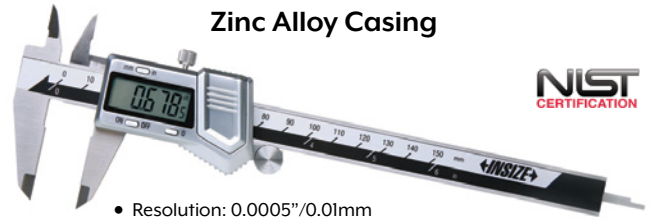

- Resolution: 0.0005"/0.01mm
- Zinc alloy casing
- Buttons: zero, on/off, inch/mm
- Auto power off
- Battery CR2032
- Stainless steel construction
- Supplied in fitted storage case

0-6 Inch/0-150mm  
Accuracy:  $\pm 0.0015"$   
Code 816012

86.69


0-8 Inch/0-200mm  
Accuracy:  $\pm 0.0015"$   
Code 816014

116.66

0-12 Inch/0-300mm  
Accuracy:  $\pm 0.0015"$   
Code 816016

201.62

### Vernier Caliper

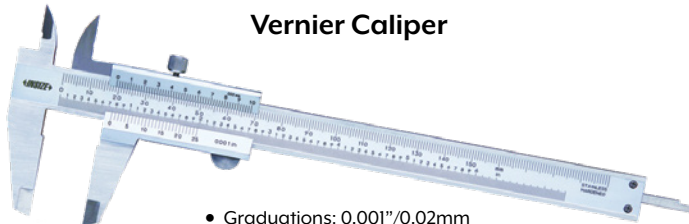

- Graduations: 0.001"/0.02mm
- Stainless steel with satin chrome plated reading surface
- Supplied in fitted storage case

0-6 Inch/0-150mm  
Accuracy:  $\pm 0.0012"$   
Code 876750

59.89

### Inside Groove Caliper



Measure the diameter of grooves inside bores



OPTIONAL ACCESSORIES:  
SPC cable  
Depth stop

- Resolution: 0.0005"/0.01mm
- Buttons: on/off, set, inch/mm, preset (+, -)
- Auto power off, move digital unit to turn power on
- Battery CR2032
- Data output
- Stainless steel construction
- Supplied in fitted storage case

Upper Jaw 0.35-6 Inch/9-150mm  
Lower Jaw 0.59-6 Inch/15-150mm  
Accuracy:  $\pm 0.0016"$

Code 817005  
407.40

<<< Many More Sizes & Styles of INSIZE Calipers Available – Contact your local KAR Distributor >>>



# TOOLS THAT MEASURE UP

## Outside Micrometers

### With Counter



- Counter resolution: 0.001"
- Thimble graduation: 0.0001"
- Ratchet stop and carbide tips
- Micrometers over 1" are supplied with a setting standard
- Supplied in fitted storage case

0-1 Inch	1-2 Inch	2-3 Inch	3-4 Inch
Accuracy: $\pm 0.00015"$	Accuracy: $\pm 0.00015"$	Accuracy: $\pm 0.0002"$	Accuracy: $\pm 0.0002"$
Code 280933	Code 280934	Code 280935	Code 280936
108. <sup>29</sup>	175. <sup>83</sup>	137. <sup>06</sup>	164. <sup>51</sup>

### Electronic – 2 Button





Spherical Anvil  
to measure  
tube thickness

- Resolution: 0.00005"/0.001mm
- Button functions: on/off, set, inch/mm, ABS/INC
- Auto power off
- Battery LR44
- Carbide tips and friction thimble
- Spherical anvil included allows tube thickness measurements
- Micrometers over 0-1"/0-25mm are supplied with a setting standard
- Supplied in fitted storage case

0-1 Inch/0-25 mm	1-2 Inch/25-50 mm	2-3 Inch/50-75 mm	3-4 Inch/75-100 mm
Accuracy: $\pm 0.0001"$	Accuracy: $\pm 0.00015"$	Accuracy: $\pm 0.00015"$	Accuracy: $\pm 0.00015"$
Code 816500	Code 816502	Code 816504	Code 816506
134. <sup>48</sup>	158. <sup>78</sup>	165. <sup>58</sup>	157. <sup>72</sup>

### Inch & Metric

- Graduation: 0.0001"/0.01mm
- Ratchet stop (816565 - with friction thimble)
- Carbide tips
- Micrometers over 1"/25mm are supplied with a setting standard
- Supplied in fitted storage case

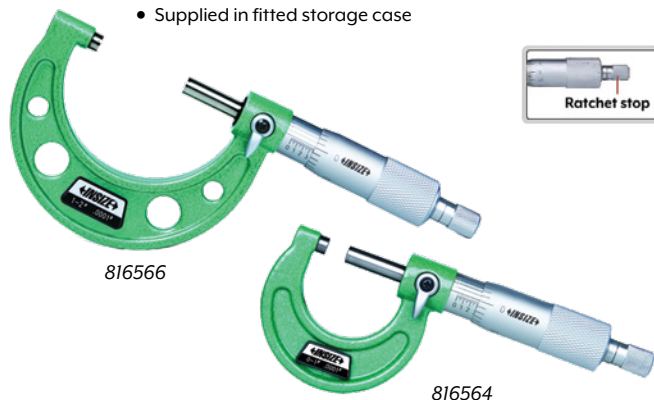

0-1 Inch with  
Friction Thimble  
Accuracy:  $\pm 0.0001"$   
Code 816565 55.<sup>46</sup>



Up to 6"/150mm micrometers sets  
supplied in plastic moulded storage case

0-12"/0-300mm  
and 6-12"/150-300mm  
micrometer sets supplied in an  
aluminum storage case

\* NIST Certification

Inch				Metric				Sets in Protective Fitted Storage Cases		
Range (Inch)	Accuracy (Inch)	Code	Price	Range (mm)	Accuracy (μm)	Code	Price	Description	Code	Price
0-1	$\pm 0.00015$	* 816564	47. <sup>88</sup>	0-25	2	* 816530	45. <sup>45</sup>	<b>Inch Sets</b>		
1-2	$\pm 0.00015$	* 816566	53. <sup>72</sup>	25-50	2	* 816532	51. <sup>00</sup>	0-3 Inch (3 micrometers, plastic case)	* 816588	151. <sup>68</sup>
2-3	$\pm 0.00020$	* 816568	59. <sup>40</sup>	50-75	2	* 816534	56. <sup>49</sup>	0-4 Inch (4 micrometers, plastic case)	* 816590	215. <sup>75</sup>
3-4	$\pm 0.00020$	* 816570	66. <sup>09</sup>	75-100	3	* 816536	62. <sup>74</sup>	0-6 Inch (6 micrometers, plastic case)	* 816592	367. <sup>97</sup>
4-5	$\pm 0.00025$	* 816572	83. <sup>89</sup>	100-125	3	816538	82. <sup>05</sup>	6-12 Inch (6 micrometers, aluminum case)	816594	874. <sup>74</sup>
5-6	$\pm 0.00025$	* 816574	95. <sup>03</sup>	125-150	3	816540	92. <sup>63</sup>	0-12 Inch (12 micrometers, aluminum case)	816596	1247. <sup>11</sup>
6-7	$\pm 0.00030$	816576	117. <sup>49</sup>	150-175	4	816542	116. <sup>65</sup>	<b>Metric Sets</b>		
7-8	$\pm 0.00030$	816578	129. <sup>25</sup>	175-200	4	816544	129. <sup>25</sup>	0-75 mm (3 micrometers, plastic case)	* 816554	162. <sup>52</sup>
8-9	$\pm 0.00030$	816580	139. <sup>51</sup>	200-225	4	816546	139. <sup>48</sup>	0-100 mm (4 micrometers, plastic case)	* 816556	200. <sup>91</sup>
9-10	$\pm 0.00030$	816582	156. <sup>23</sup>	225-250	5	816548	156. <sup>25</sup>	0-150 mm (6 micrometers, plastic case)	816558	360. <sup>12</sup>
10-11	$\pm 0.00035$	816584	173. <sup>02</sup>	250-275	5	816550	173. <sup>03</sup>	150-300 mm (6 micrometers, aluminum case)	816560	856. <sup>71</sup>
11-12	$\pm 0.00035$	816586	183. <sup>57</sup>	275-300	5	816552	183. <sup>57</sup>	0-300 mm (12 micrometers, aluminum case)	816562	1251. <sup>52</sup>

## Depth Micrometer



- Graduation: 0.001"
- Micrometer head accuracy:  $\pm 0.00012$ "
- Rod accuracy:  $\pm [0.001 + 0.0005(L/3)]$   
(L = measuring range in inch)
- 6 rods with flat end
- Ratchet stop
- Supplied in fitted storage case

0-6 Inch  
Code 281939

203.17

## Miniature Electronic Depth Gage

Measure depth of small  
grooves, holes, and tire tread



- Resolution: 0.0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Supplied with zero set surface
- Auto power off, move digital unit to turn power on
- Battery CR2032
- Data output
- Stainless steel construction
- Supplied in fitted storage case

0-1 Inch/0-25mm  
Accuracy:  $\pm 0.0015$ "  
Code 284550

127.75

OPTIONAL ACCESSORY: SPC cable

## Dial Bore Gages

- Indicator graduation: 0.0005"
- Indicator range: 0.25"
- Repeatability: 0.00015"
- Supplied in fitted storage case



OPTIONAL ACCESSORIES: Setting Ring  
Long Handle

816192

0.7-1.5 Inch  
Accuracy:  $\pm 0.00075$ "  
Code 282930

293.85

1.4-2.4 Inch  
Accuracy:  $\pm 0.0009$ "  
Code 816188

290.26

2-6 Inch  
Accuracy:  $\pm 0.0009$ "  
Code 816192

306.75

6-10 Inch  
Accuracy:  $\pm 0.0009$ "  
Code 816184

305.15

10-16 Inch  
Accuracy:  $\pm 0.0009$ "  
Code 816186

352.97



Each set supplied in plastic moulded storage case

### 2 Bore Gage SET

- 1.4-2 Inch (Indicator/handle not included)
  - 2-6 Inch
- Accuracy:  $\pm 0.0009$ "  
Code 877159

238.05

### 3 Bore Gage SET

- 0.7-1.5 Inch
  - 1.4-2.4 Inch (Indicator not included)
  - 2-6 Inch (Indicator not included)
- Accuracy:  $\pm 0.0009$ " (except 2-6" =  $\pm 0.00075$ "")  
Code 877160

471.62



# TOOLS THAT MEASURE UP

## Pitch Gages

- For measuring the pitch of screw threads
- Blades individually marked with pitch
- Medium carbon steel
- Supplied in storage pouch



0.4-7mm/4-42TPI  
Code 816695

19.<sup>63</sup>

0.25-7mm  
Code 283551

15.<sup>11</sup>

4-42TPI  
Code 283552

18.<sup>12</sup>

Range	Accuracy	Thread Type	Blade Pitch	Code
0.4-7mm	±0.07mm	Metric 60°	52 blades: 0.4, 0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7 mm	816695
4-42TPI	±0.0028"	Unified 60°	4, 4-1/2, 5, 5-1/2, 6, 7, 8, 9, 10, 11, 11-1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42 TPI	
0.25-7mm	±0.0028"	Metric 60°	24 blades: 0.25, 0.3, 0.35, 0.4, 0.5, 0.7, 0.75, 0.8, 0.9, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7 mm	283551
4-42TPI	±0.0028"	Unified 60°	30 blades: 4, 4-1/2, 5, 5-1/2, 6, 7, 8, 9, 10, 11, 11-1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42 TPI	283552

## Drill Angle Gage

- For checking drills with 60°, 70°, 90°, 118°, 125°, 135°, 150°, or 160° angles
- Stainless steel
- Supplied in storage pouch



0-180° Range  
Accuracy: ±0.5°  
Code 816683

16.<sup>48</sup>

## Sheet Metal Gage

American Standard

- US standard for gaging sheet metal, plate iron and steel
- Hardened steel with satin chrome finish
- Supplied in storage pouch

#0-36 Range  
(0.3125-0.007")  
Code 283575

36.<sup>03</sup>



## Taper Gage

- Graduation: 0.1mm
- For quick measuring of slot width and various gaps in material and work pieces
- Diameter correction table on back
- Supplied in storage pouch

0.8mm - 15mm  
Accuracy: ±0.1mm  
Code 285112

24.<sup>49</sup>



## Feeler Gage

Hardened Alloy Steel Blades with 1 Brass

- Hardened alloy steel (except 0.01" blade - brass)
- Blades individually marked with inch/metric measurements
- Supplied in storage pouch



32 Blades  
0.0015-0.035 Inch Range  
Code 283543


12.<sup>92</sup>

## Small Hole Gage Set

- For small holes, slots, grooves, etc.
- Satin chrome finish
- Supplied in storage pouch

0.125 to 0.5 Inch  
Code 816204

37.<sup>35</sup>

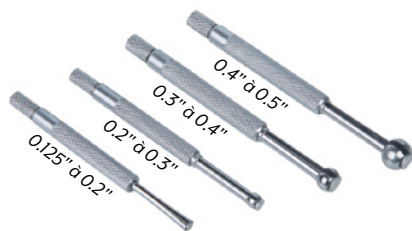


## Telescoping Gage Set

- For quick measurement of inside diameter of holes and width of slots
- Satin chrome finish
- Supplied in storage pouch

6 Gages  
5/16 to 6 Inch  
Code 816202

53.<sup>69</sup>

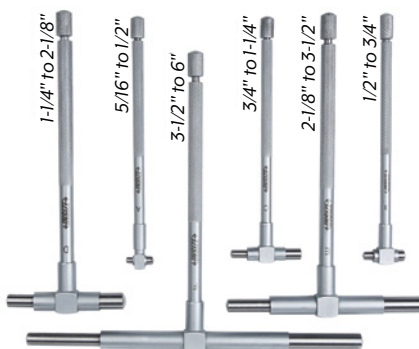

## Electronic Chamfer Gage

- Measures 45° chamfer dimension
- Resolution: 0.0005"/0.01mm
- Accuracy: ±0.0025"/0.063mm
- Buttons: on/off, zero, inch/mm
- Auto power off - move unit to turn power on
- Battery CR2032
- Data output
- Stainless steel



OPTIONAL ACCESSORY: SPC cable

0-0.39 Inch/0-10mm  
Code 816370

212.<sup>97</sup>



## Edge Finder

- Hardened shank and contact point




Shank: Ø3/8"  
Contact Point: Ø0.2"  
Accuracy: ±0.0003"  
Code 816383

62.34

<<< MORE STYLES AVAILABLE >>>

Contact your local  
KAR Distributor

## Centering Indicator

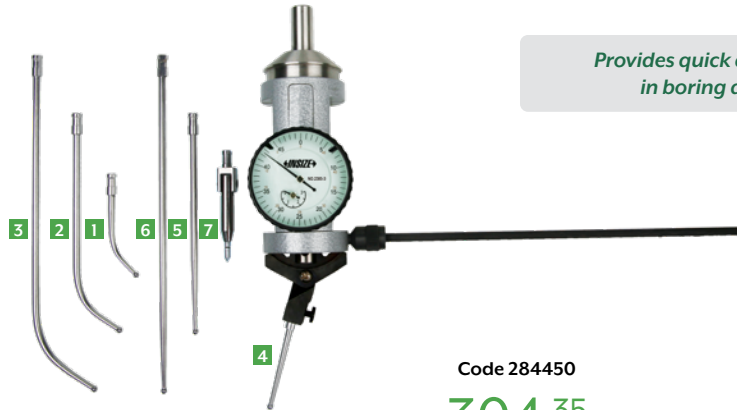

Provides quick and accurate centering  
in boring and milling set-ups

Code 284450

304.35

	Accuracy	Measuring Diameter
1	±0.0015"	Ø 0-2.362"
2	±0.0023"	Ø 0-6.299"
3	±0.0031"	Ø 0-9.843"
4	±0.0015"	Ø 0.126-3.15"
5	±0.0023"	Ø 0.126-7.087"
6	±0.0031"	Ø 0.126-11.024"
7	±0.0015"	Ø 0-0.11"

## Dial Indicators

### Inch

- ASME B89.1.10M-2001 standards
- Graduation: 0.001"
- First 2.5 rev. accuracy: ±0.001"
- Range per rev.: 0.1"
- Dial reading: 0-100
- Lug back
- Bezel locking clamp and limit pointers
- Contact point thread: #4-48UNF
- Supplied in fitted storage case



816158

OPTIONAL ACCESSORIES: Contact points, Flat back

### Metric

- Hysteresis: 20µm
- Graduation: 0.1mm
- Range per rev.: 10mm
- Dial reading: 0-10
- Lug back
- Bezel locking clamp and limit pointers
- Contact point thread: M2.5 x 0.45
- Supplied in fitted storage case



25mm  
Accuracy: 60µm  
Code 816164

106.88

OPTIONAL ACCESSORIES: Contact points, Flat back

0.5 Inch  
Accuracy: ±0.002"  
Code 816156

47.49

1 Inch  
Accuracy: ±0.002"  
Code 816158

44.82

2 Inch  
Accuracy: ±0.004"  
Code 816160

105.55

### Optional Magnetic Back

For 1 Inch  
Dial Indicator  
816158




Diameter: 2.126"  
Code 877212

28.58

## Dial Test Indicators

- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti-magnetic body
- Supplied with two clamps: 5/32" and 3/8" diameters
- Supplied in fitted storage case

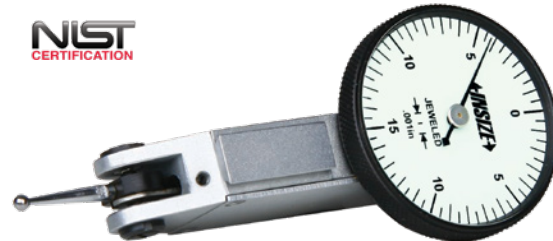

Supplied with two clamps

OPTIONAL  
ACCESSORY:  
Contact point  
(stylus) - series 6284

0.03 Inch  
Graduation: 0.001"  
Accuracy: ±0.001"  
Dial reading: 0-15-0  
Code 282858

98.29

0.03 Inch  
Graduation: 0.0005"  
Accuracy: ±0.0005"  
Dial reading: 0-15-0  
Code 816170

128.54

0.008 Inch  
Graduation: 0.0001"  
Accuracy: ±0.0001"  
Dial reading: 0-40-0  
Code 816172

171.28

0.03 Inch  
Graduation: 0.001"  
Accuracy: ±0.001"  
Dial reading: 0-15-0  
Code 282859

101.51

0.03 Inch  
Graduation: 0.0005"  
Accuracy: ±0.0005"  
Dial reading: 0-15-0  
Code 282860

103.88

0.008 Inch  
Graduation: 0.0001"  
Accuracy: ±0.0001"  
Dial reading: 0-40-0  
Code 282861

171.95

<<< Ask about other Sizes & Accessories for INSIZE Dial Indicators – Contact your local KAR Distributor >>>

# TOOLS THAT MEASURE UP

## Magnetic Stands

### Universal Light Duty

- For electronic/dial indicators and dial test indicators
- With fine adjustment and dovetail groove
- Applicable holding stem Ø: 3/8"

With Fine Adjustment  
Magnetic force: 176lbf/80kgf  
Code 816256

89.69



### With Flex Arm

- For dial test indicators
- Applicable holding stem Ø: 3/8", 8mm, 4mm

Magnetic force: 176lbf/80kgf  
Code 282892

75.77



### With Dual Stems

- For electronic/dial indicators and dial test indicators
- Applicable holding stem Ø: 3/8", 8mm, 4mm



Magnetic force: 132lbf/60kgf  
Code 816250

33.46



With Fine Adjustment  
Magnetic force: 132lbf/60kgf  
Code 816252

30.98



With Fine Adjustment  
Magnetic force: 176lbf/80kgf  
Code 282886

81.08



With Fine Adjustment  
Magnetic force: 220lbf/100kgf  
Code 816254

95.54

## Portable Refractometer

- Dimensions: 1.06" x 1.57" x 6.3"
- Weight: 0.39 lbs
- Graduations: 0.2%
- Measuring range: 0-32%
- Quickly measure the concentration of coolant
- Refer to the refraction factor of coolant – ex: the refraction factor of grinding emulsion is 2.1, the reading value is 6%, so the actual concentration is  $2.1 \times 6\% = 12.6\%$
- Suitable for water based coolant

*Quickly measure the  
concentration of coolant*



Code 219182

153.03



# TOOLS THAT MEASURE UP

EXCLUSIVELY AVAILABLE FROM **KAR** IN CANADA 

## Protractors & Levels

### Protractors



- Graduations: 1°
- Accuracy:  $\pm 0.3^\circ$
- Stainless steel with satin chrome plated scale
- With locking screw
- Supplied in storage case

0-180° Range  
Code 283330

47.25



- Graduations: 1°
- Accuracy:  $\pm 0.3^\circ$
- Stainless steel with satin chrome plated scale
- With locking screw
- Supplied in storage case

0-180° Range  
Code 283328

18.91

### Electronic Protractor

- Resolution: 0.1°
- Accuracy:  $\pm 0.3^\circ$
- Buttons: on/off, zero
- With locking screw
- Graduation of blade: 1/32" and 1mm
- Stainless steel
- Battery CR2032
- Auto power off



0-360° Range, 8 Inch  
Code 877018

81.15

### Portable Level

- Accuracy:  $\pm 0.006''/ft$
- Shockproof vials
- Magnetic base
- Shock absorbing rubber end caps
- Working temperature: 5°F-131°F (-15°C-55°C)
- Vials made in Israel - lifetime warranty



4 x 2 x 0.787 Inch  
Code 877180

14.11

### Electronic Level & Protractor

- Resolution: 0.1° (=0.021 in/ft)
- Accuracy: 0° and 90°:  $\pm 0.1^\circ$ ; others:  $\pm 0.2^\circ$
- Used as level and protractor
- Aluminum frame
- Magnetic bottom
- Display rotates when gage is upside down
- Backlight on automatically when in use - auto off 15 minutes after use
- Sea level permanently set inside chip - zero setting not required when battery replaced
- Buttons: on/off, zero, absolute and incremental measurement
- Battery 1 x AAA
- Auto power off
- Supplied in leather pouch



4 x 90° Range  
Code 816396

100.49

## Rules

### Rigid Rules



- 4R graduation
- 1/64" and 1/32" on front, 1/16" and 1/8" on back
- Non-glare surface

6 Inch  
Accuracy:  $\pm 0.003''$   
Code 877203

2.20

12 Inch  
Accuracy:  $\pm 0.004''$   
Code 877201

3.89

24 Inch  
Accuracy:  $\pm 0.006''$   
Code 877202

7.74

### Semi-Flexible Rules



- Accuracy:  $\pm 0.006''$  (except 24 Inch/600mm:  $\pm 0.008''$ )
- Graduations front & back: 1/64", 1/32", 1/16", 0.5mm and 1mm
- Semi-flexible, stainless steel with non-glare surface
- Supplied in storage pouch

6 Inch/150mm  
Code 283596

2.55

8 Inch/200mm  
Code 283597

3.02

12 Inch/300mm  
Code 283598

4.48

20 Inch/500mm  
Code 283599

10.15

24 Inch/600mm  
Code 283600

11.51

<<< UP TO 80 INCH/2000MM AVAILABLE >>>

## Combination Square



Code 283344

208.74

OPTIONAL ACCESSORY: Rigid Rule 283006

- 1/8" & 1/16" graduations side 1, 1/32" & 1/64" graduations side 2
- Square, level, marking gage, scribe, center gage, protractor and 12" rule
- Center Head: to locate center of round workpieces - Accuracy:  $\pm 0.006''$
- Protractor Head: to set the blade at desired angle to an edge of a workpiece, and may be used to measure angles - Range: 0-180°; Accuracy:  $\pm 7min.$
- Square Head: to set the blade at 90° or 45° to an edge of a workpiece - Accuracy:  $\pm 8min.$  for 90° square and  $\pm 10min.$  for 45° square
- Supplied in fitted storage case

**2022 List Prices subject to change without notice**

\*Products shown may not be exactly as illustrated Code 000315

FIND DISTRIBUTOR

MAKING IT EASY TO DO BUSINESS WITH SINCE 1954... CONTACT YOUR LOCAL KAR DISTRIBUTOR TODAY!